

COMAV'S SLIDE GATE VALVE SGM is designed to shut off the material from hopper, silo, rotary valve when maintenance of downstream equipment is request.

SGM finds a wide application thank to a narrow profile and with the concept of "self-cleaning" on blade after each open stroke assures a long life.



APPLICATIONS

- GRAVIMETRIC FLOW
- POWDER
- GRANULE
- PELLETS

DESIGN


- SIZE: DN 150, DN 200, DN 250
- BODY: CASTING ALUMINIUM
- BLADE: STAINLESS STEEL AISI 304/316L
- OPERATION: MANUAL

FEATURES

- PRESSURE: ATM
- TEMPERATURE: MAX 100 °C
- NARROW PROFILE
- FREE OPENING
- HORIZONTAL AND VERTICAL INSTALLATION
- LONG LIFE

OPTIONALS

- SPECIAL EXECUTION FOR ABRASIVE PRODUCT
- FOOD GRADE APPROVED MATERIAL
- CUSTOM SIZE

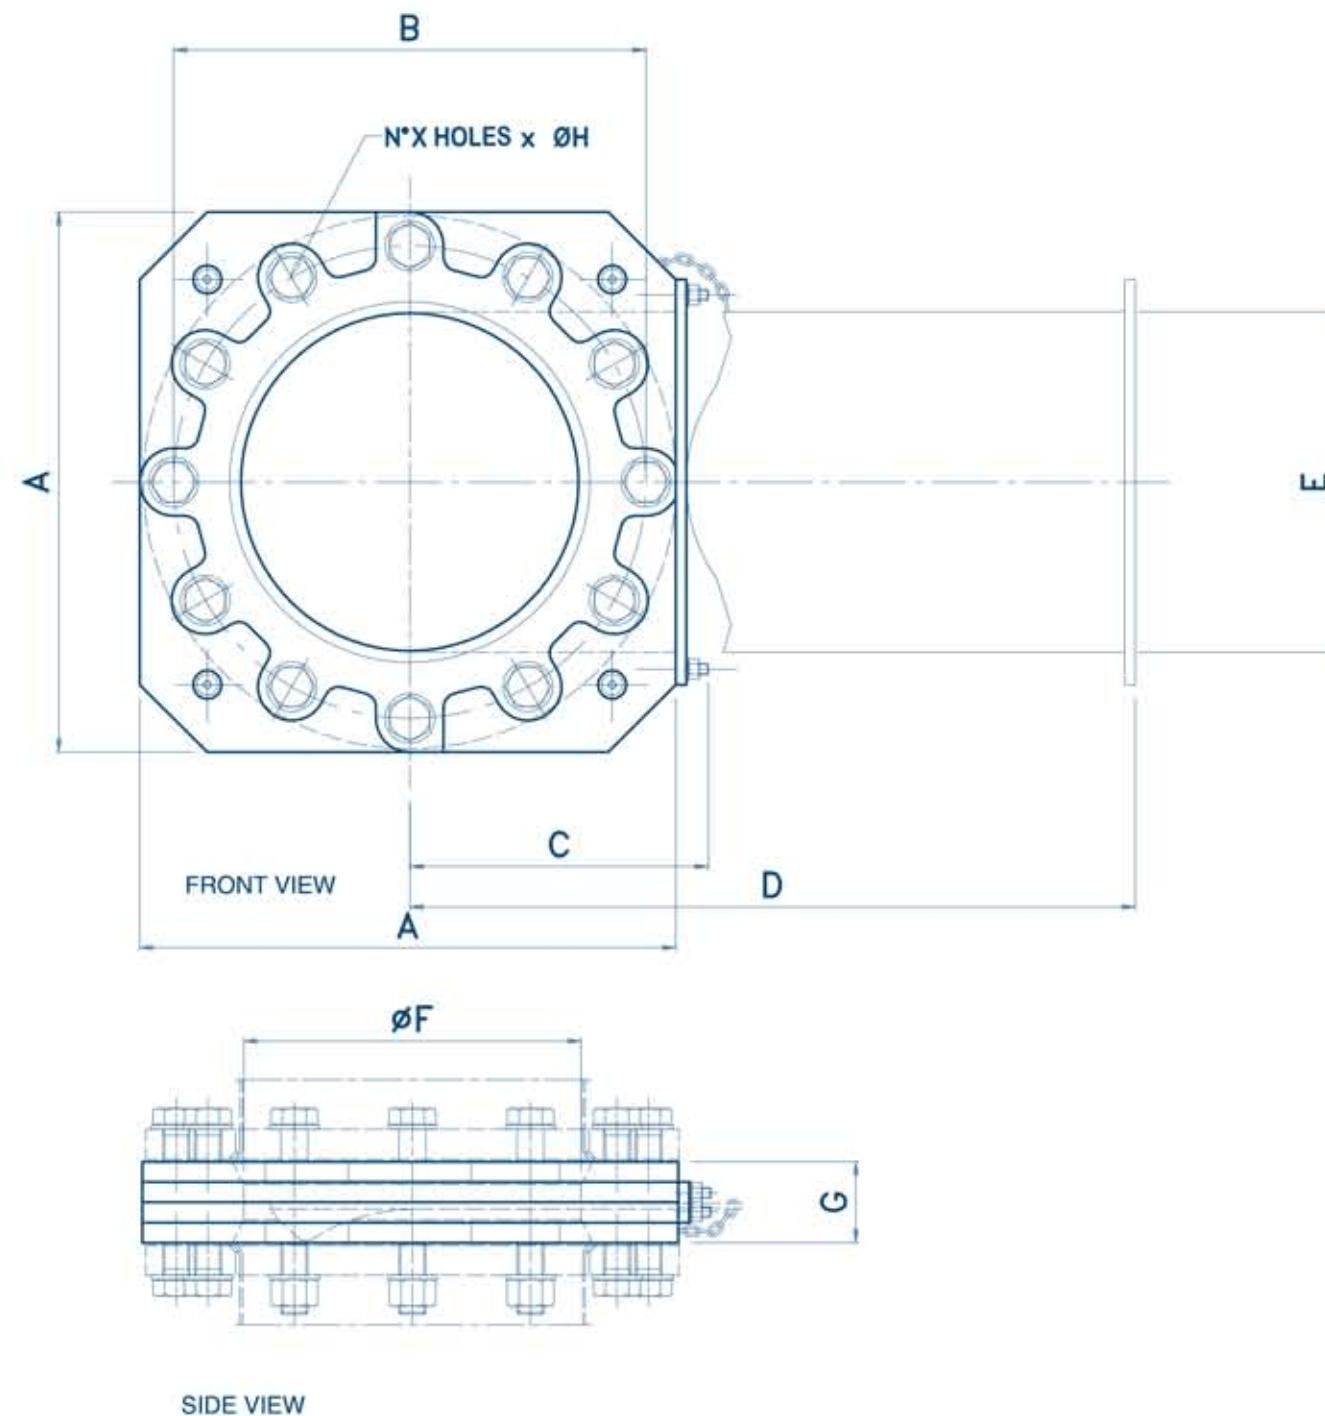

	A	B	C	D	E	F	G	I x ML
150	285	Ø240	180	406	160	Ø156	58	8 x Ø22
200	340	Ø295	208	484.5	205	Ø200	64	8 x Ø22
250	400	Ø350	237	568	264	Ø250	60	12 x Ø22

BROCHURE



COMPLIANCE



II 2/3DC T135*